

3307 P PADFOOT COMPACTOR



Machine équipée d'options



- Hydrostatic drive, infinitely variable
- Traction control
- High engine performance
- High gradeability
- Clear instrument panel
- Ergonomic driver seat
- Adjustable sliding and swivelling seat
- Adjustable steering column
- Self-locking differential
- New articulation
- New cooling system
- Optimum visibility
- Easy maintenance, long service intervals

TECHNICAL DATA 3307 P
Weight

Basic weight without cab	6.450 kg
Operating weight with cab	7.050 kg
Weight on drum	3.940 kg
Weight on tires	3.110 kg

Dimensions

Working width	1.680 mm
Drum diameter over padfeet	1.356 mm
Padfeet:	
Number	112
Height	80 mm
Surface	113,4 cm ²
Turning radius inside	3.060 mm

Engine

Deutz-Turbo Diesel, oil-cooled, 4-cylinder	Type BF4M 1011F
Performance to ISO 3046/1, ISO 9249	61 kW/82,9 PS at 2.800 rpm
Performance to SAE J1349	61 kW/81,8 HP at 2.800 rpm
Fuel tank	175 ltr.

Drive

Hydrostatic drive, infinitely variable	all-wheel
Planetary axle with self-locking differential	

Speed

Variable speed preselection	
Working speed	0-4,5/0-6/0-7,2 km/h
Travel speed	0-11,9 km/h

Gradeability

With/without vibration	65/70 %
------------------------	---------

Vibration system

Hydrostatic drive	
Frequency	30/42 Hz
Nominal amplitude	1,7/0,6 mm
Total compaction force	194,5/167,5 kN

Steering

Articulated frame steering $\pm 35^\circ$, oscillation angle $\pm 10^\circ$
Hydrostatic servosteering

Brakes

Service brake: hydrostatic
Parking brake: spring loaded
Emergency brake: by hydrostatic drive and spring loaded brake

Tires

Profile tires AW 14.9/13-24/6 PR

Electrical system

Operating voltage 12 V, battery 135 Ah
--

Equipment

Suspended driving stand, access from both sides. Sliding and swivelling seat console, 2 multifunctional drive levers. Traction control. Swivelling drive and dashboard console. Modern information and control display. Sound insulation. Tilttable GFK-engine hood. CE-conformity.



Optional

Comfortable ROPS cab with panoramic view. Working lights, wipers front/rear, exterior and interior mirrors. Radio. Heating with dust free ventilation. Air conditioning. ROPS-FOPS. Sun top. Compaction meter. Documentation system CDS. Tachograph. Lighting according to German Road Regulation. Levelling blade. Special paint. (extended list upon request)

Description:

Padfoot compactor

3307 P

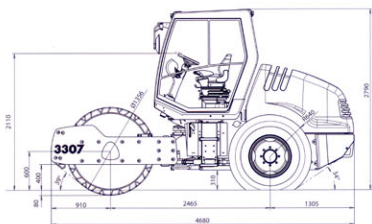

Votre concessionnaire

 Caractéristiques techniques conformes à la norme CECE
 Les spécifications des machines peuvent être modifiées à tout moment et sans préavis

3307 P 11.02.02 02 00 05

HAMM AG

 Hammstraße 1 • Postfach 11 60 • D-95633 Tirschenreuth
 Tel. +49 (0) 9631 / 80-0 • Fax +49 (0) 9631 / 80 120
 www.hammag.com